







LCD

6

0 1000V, 250V 10kV, 0.01MΩ 1000GΩ
0 750V

	250V(± 10%)	0 10MΩ	± 3%rdg ± 5dgt	0.01MΩ
		10 100MΩ		0.1MΩ
		100 1000MΩ		1MΩ
		1G 10GΩ	± 5%rdg ± 5dgt	0.01GΩ
	500V(± 10%)	0 10MΩ	± 3%rdg ± 5dgt	0.01MΩ
		10 100MΩ		0.1MΩ
		100 1000MΩ		1MΩ
		1G 10GΩ	± 5%rdg ± 5dgt	0.01GΩ
	1000V(± 10%)	0 20MΩ	± 3%rdg ± 5dgt	0.01MΩ
		20 200MΩ		0.1MΩ
		200 2000MΩ		1MΩ
		2G 20GΩ	± 5%rdg ± 5dgt	0.01GΩ
	2500V(± 10%)	0 2000MΩ	± 3%rdg ± 5dgt	1MΩ
		2000MΩ 20GΩ	± 5%rdg ± 5dgt	0.01GΩ

225

027-83267669

	5000V(±10%)	20GΩ 200GΩ	±20%rdg ±10dgt	0.1GΩ
		0 2000MΩ	±3%rdg ±5dgt	1MΩ
		2000MΩ 20GΩ	±5%rdg ±5dgt	0.01GΩ
		20GΩ 200GΩ	±20%rdg ±10dgt	0.1GΩ
		200GΩ 1000GΩ	±20%rdg ±10dgt	1GΩ
	10kV(±10%)	0 2000MΩ	±3%rdg ±5dgt	1MΩ
		2000MΩ 20GΩ	±5%rdg ±5dgt	0.01GΩ
		20GΩ 200GΩ	±20%rdg ±10dgt	0.1GΩ
		200GΩ 1000GΩ	±20%rdg ±10dgt	1GΩ

1 TΩ Tera ohm =1000GΩ=10¹²Ω

1 GΩ Giga ohm =1000MΩ=10⁹Ω

1 MΩ Mega ohm =1000KΩ=10⁶Ω

	DC 0.0V 1000V	±1.5%rdg ±3dgt	0.1V
	AC 0.0V 750V	±1.5%rdg ±3dgt	0.1V

	23	± 5	75%rh				
(V)	250	500	1000	2500	5000V	10KV	
(V)	× 1 ± 10%						
GΩ	0.01MΩ 1000GΩ					: 0.01MΩ	
	0 1000V					: 0.1V	
	0 750V					: 0.1V	
	≥ 5mA(10KV)						





1. LCD
2. LINE
3. V
4. GUARD
5. EARTH
- 6.
7. USB
- 8.
- 9.
- 10.
- 11.
- 12.
- 13.
- 14.
- 15.

1

LINE


GUARD

I


$R = V / I$

V

R



$$R = V / I$$

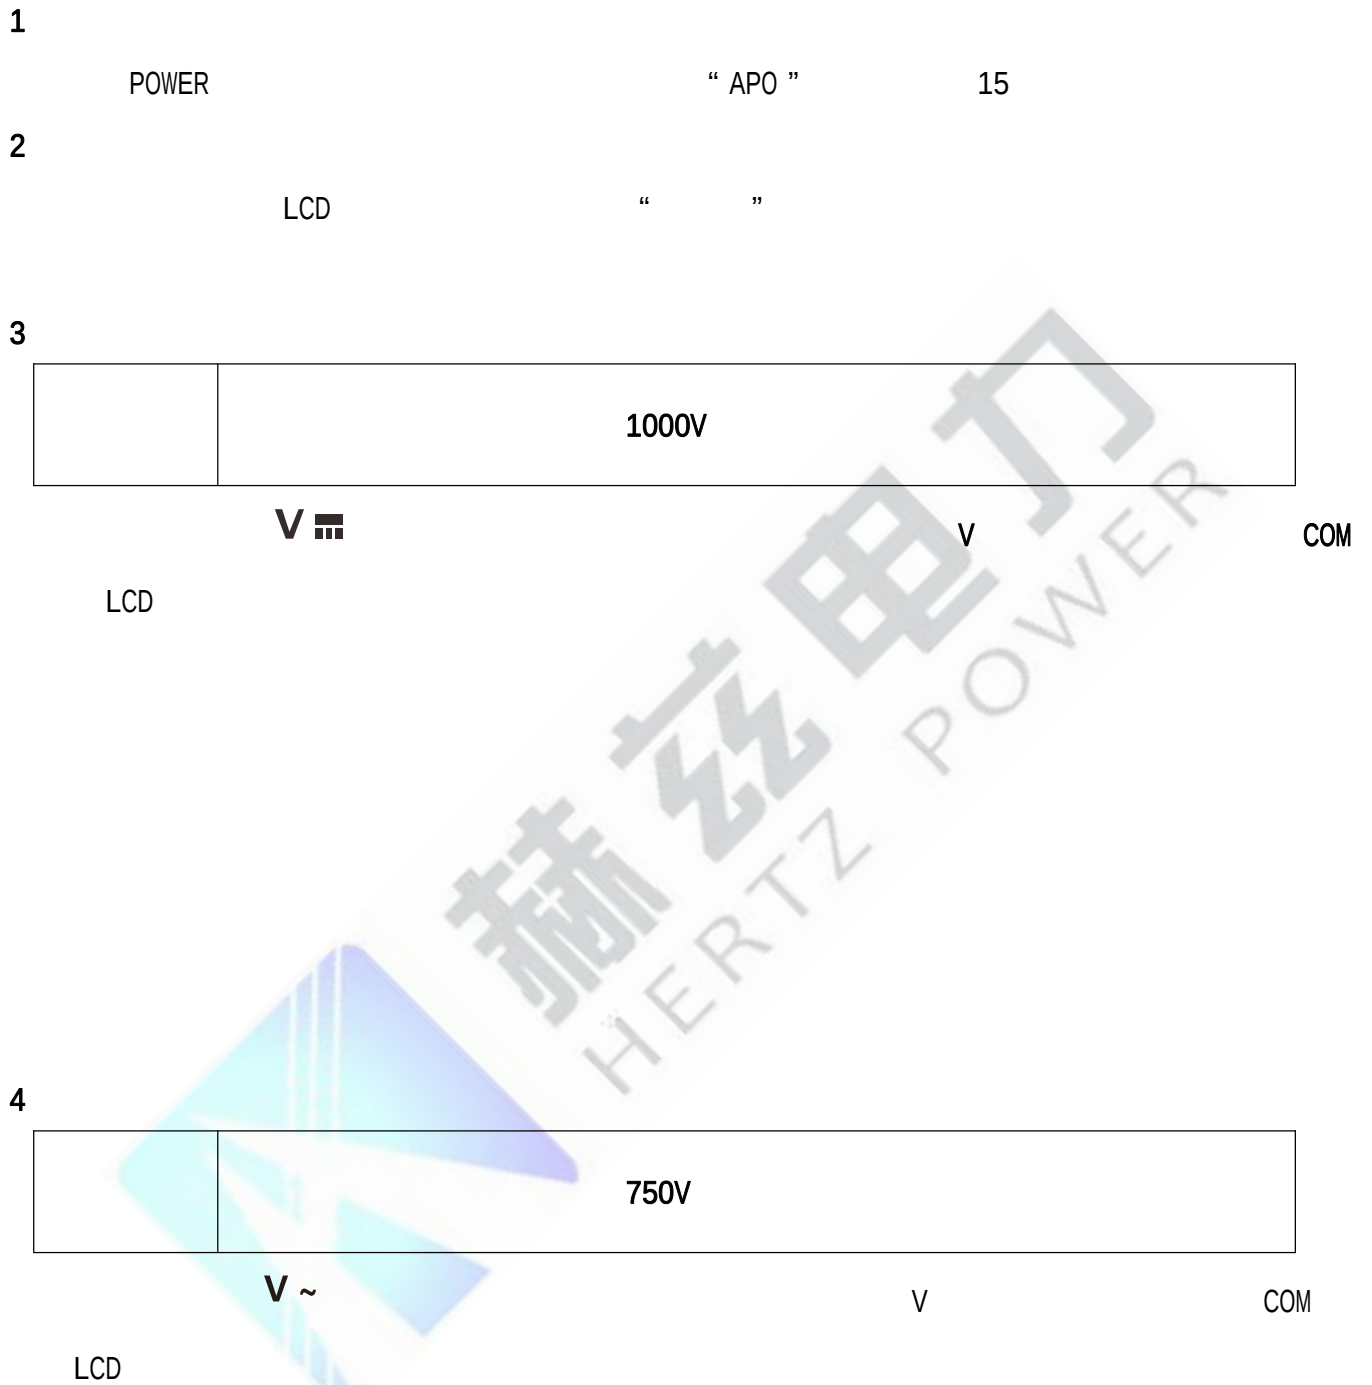





6 GUARD

7 PI (DAR)
7.1







“ ”

“ 60:15S ”

15S

“ ” “ ”

7.4

PI

DAR

()

() (1)



“ ”

“ _ _ _ _ ”

600V

9999MΩ

10 /

“ MEM ”

“ FULL ”

1258MΩ

“ MEM ”

3

11 /

“ MR ”

“ MR ”

“ ▲ ” “ ▼ ”

1

“ ”

“ ”

10

“ MR ”

3

6


LCD

“ NULL ”

“ CLEAR ”

NO

, YES



12V

10V

“ ” ,

1

1

2 , 1





“

”

“

”

1

2

1.

2.



1

2

3

2

24

027-83267669

24

48

4